

WORK-S 800-1+2

The compact pallet **TERMINAL** for high transfer weights



Clearly structured control interface. Optionally also integrated directly into the machine controller.



Ergonomic setup station for setup during primary processing, with mechanical interlock for maximum safety

Area of application:

Our WORK-S 800-1+2 pallet TERMINAL is ideal for linking to all variants of machining centres and milling machines up to a clamping pallet size of 630 x 630 mm. With 8 or 14 pallet stations (1 or 2 levels), the terminal offers sufficient reserves for unmanned shifts. With a maximum transfer weight of up to 800 kg, it is ideal for large and heavy workpieces.

Your advantages at a glance:

- ✓ **Productive** – ready for unmanned shifts
- ✓ **Space-saving** – high pallet density on a minimum footprint
- ✓ **Efficient** – setup of your pallets during primary processing
- ✓ **High capacity** – transfer weights up to 800 kg
- ✓ **Versatile** – can be operated on multiple machines and centres

Options:



- ✓ Multi-machine linking for up to 2 machines
- ✓ Additional setup station for even more efficiency
- ✓ Flexible division of the tool slots
- ✓ Dedicated pallet management / control using PROCAM

Technical data




WORK-S 800-1+2 TERMINAL


Dimensions	see drawing
Footprint	approx. 11.5 m ²
Transfer weight	800 kg
Pallet types	630 x 630 mm 500 x 400 mm
Tool dimensions	Ø 800 mm up to 500 mm height
Pallet management	PROCAM Augusta PROCAM EMS machine controller
Controller	BECKHOFF TwinCAT3

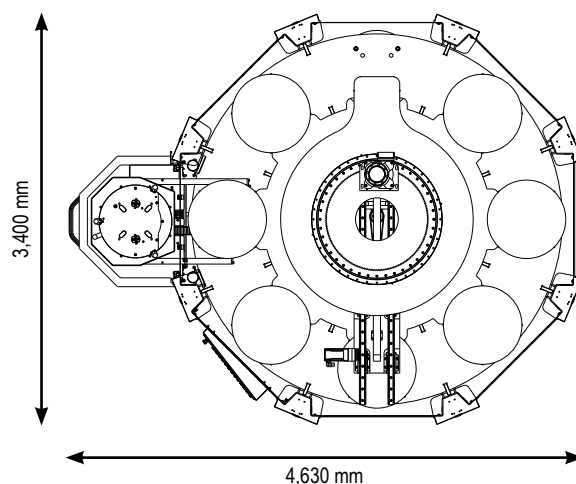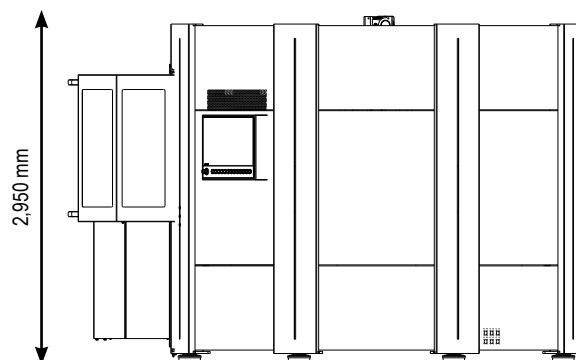

Level 1:
8 stations for workpiece dimension up to Ø 800 mm and workpiece height up to 350 mm

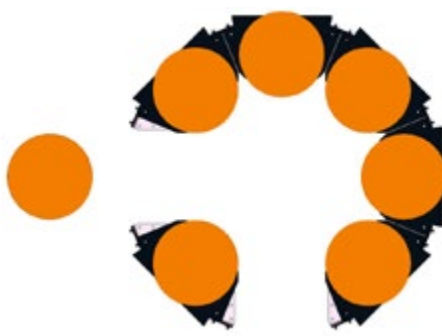


Option level 2:
6 additional stations for workpiece dimension up to Ø 800 mm and workpiece height up to 500 mm

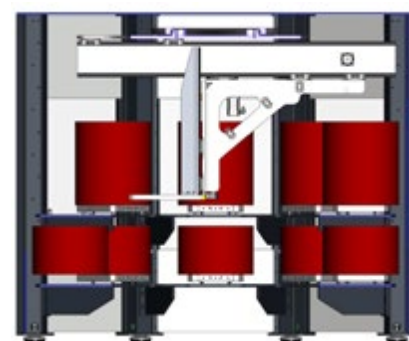

With the optional second level, a total of 14 pallet stations with workpiece dimension up to Ø 800 mm and workpiece height up to 500 mm can be used.

Maximum dimensions:



More information on our
WORK-S 800-1



More information on our
WORK-S 800-2